

naturally better
hurlcon hydronic heating




With three great styles - ThermaRad Classic, ThermaStyle and ThermaDesign to choose from, ThermaRad makes interiors easy.



Hotter by degrees...

Hurlcon Heating have sold Termo Teknik's ThermaRad radiators since 1996, now the longest continuously available radiator on the Australian market. Termo Teknik is a subsidiary of the UK based Ideal Stelrad Group, a leading heating business in Europe.

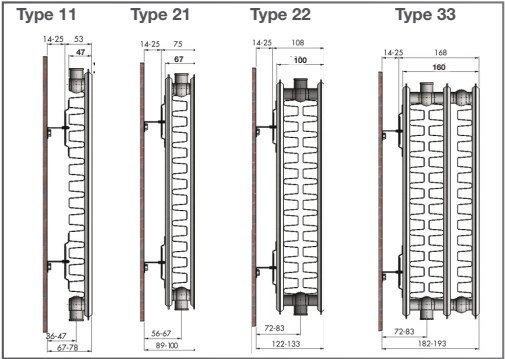

THERMARAD CLASSIC TYPE 11								
L (mm)	H (mm)	200	300	400	500	600	700	900
400	kW	0.18	0.26	0.33	0.40	0.46	1.20	0.64
500	kW	0.22	0.32	0.41	0.49	0.57	0.52	0.79
600	kW	0.27	0.38	0.49	0.59	0.69	0.65	0.95
700	kW	0.31	0.45	0.57	0.69	0.80	0.78	1.11
800	kW	0.36	0.51	0.66	0.79	0.92	0.91	1.27
900	kW	0.40	0.58	0.74	0.89	1.03	1.04	1.43
1000	kW	0.45	0.64	0.82	0.99	1.15	1.17	1.59
1100	kW	0.49	0.70	0.90	1.09	1.26	1.30	1.75
1200	kW	0.54	0.77	0.98	1.19	1.38	1.43	1.91
1300	kW	0.58	0.83	1.06	1.28	1.49	1.56	2.06
1400	kW	0.62	0.90	1.15	1.38	1.61	1.69	2.22
1500	kW	0.67	0.96	1.23	1.48	1.72	1.82	2.38
1600	kW	0.71	1.02	1.31	1.58	1.84	1.95	2.54
1700	kW	0.76	1.09	1.39	1.68	1.95	2.08	2.70
1800	kW	0.80	1.15	1.47	1.78	2.07	2.21	2.86
1900	kW	0.85	1.22	1.56	1.88	2.18	2.34	3.02
2000	kW	0.89	1.28	1.64	1.98	2.30	2.47	3.18
2200	kW	0.98	1.41	1.80	2.17	2.53	2.60	3.49
2400	kW	1.07	1.54	1.97	2.37	2.76	2.86	3.81
2700	kW	1.20	1.73	2.21	2.67	3.10	3.12	4.29
3000	kW	1.34	1.92	2.46	2.96	3.44	3.51	4.76
THERMARAD CLASSIC TYPE 22								
L (mm)	H (mm)	200	300	400	500	600	700	900
400	kW	0.32	0.48	0.61	0.73	0.85	0.96	1.17
500	kW	0.40	0.60	0.76	0.92	1.07	1.20	1.46
600	kW	0.48	0.72	0.92	1.10	1.28	1.44	1.75
700	kW	0.56	0.84	1.07	1.29	1.49	1.68	2.05
800	kW	0.64	0.96	1.22	1.47	1.70	1.92	2.34
900	kW	0.72	1.08	1.38	1.65	1.92	2.17	2.63
1000	kW	0.81	1.20	1.53	1.84	2.13	2.41	2.92
1100	kW	0.89	1.32	1.68	2.02	2.34	2.65	3.22
1200	kW	0.97	1.44	1.84	2.20	2.56	2.89	3.51
1300	kW	1.05	1.56	1.99	2.39	2.77	3.13	3.80
1400	kW	1.13	1.68	2.14	2.57	2.98	3.37	4.09
1500	kW	1.21	1.80	2.29	2.76	3.19	3.61	4.39
1600	kW	1.29	1.92	2.45	2.94	3.41	3.85	4.68
1700	kW	1.37	2.04	2.60	3.12	3.62	4.09	4.97
1800	kW	1.45	2.16	2.75	3.31	3.83	4.33	5.26
1900	kW	1.53	2.28	2.91	3.49	4.05	4.57	5.56
2000	kW	1.61	2.40	3.06	3.67	4.26	4.81	5.85
2200	kW	1.77	2.64	3.36	4.04	4.68	5.29	6.43
2400	kW	1.93	2.88	3.67	4.41	5.11	5.77	7.02
2700	kW	2.17	3.01	4.13	4.96	5.75	6.50	7.89
3000	kW	2.42	3.13	4.59	5.51	6.39	7.22	8.77

THERMARAD CLASSIC TYPE 21								
L (mm)	H (mm)	200	300	400	500	600	700	900
400	kW	0.26	0.37	0.46	0.55	0.64	0.73	0.89
500	kW	0.32	0.46	0.58	0.69	0.80	0.91	1.11
600	kW	0.39	0.56	0.70	0.83	0.96	1.09	1.34
700	kW	0.45	0.65	0.81	0.97	1.12	1.27	1.56
800	kW	0.52	0.74	0.93	1.11	1.28	1.45	1.78
900	kW	0.58	0.83	1.04	1.24	1.44	1.63	2.00
1000	kW	0.65	0.93	1.16	1.38	1.60	1.81	2.23
1100	kW	0.71	1.02	1.27	1.52	1.76	1.99	2.45
1200	kW	0.78	1.11	1.39	1.66	1.92	2.18	2.67
1300	kW	0.84	1.2	1.51	1.80	2.08	2.36	2.89
1400	kW	0.91	1.3	1.62	1.94	2.24	2.54	3.12
1500	kW	0.97	1.39	1.74	2.07	2.40	2.72	3.34
1600	kW	1.04	1.48	1.85	2.21	2.56	2.90	3.56
1700	kW	1.10	1.57	1.97	2.35	2.72	3.08	3.78
1800	kW	1.17	1.67	2.09	2.49	2.88	3.26	4.01
1900	kW	1.23	1.76	2.20	2.63	3.04	3.44	4.23
2000	kW	1.30	1.85	2.32	2.77	3.20	3.63	4.45
2200	kW	1.43	2.04	2.55	3.04	3.52	3.99	4.90
2400	kW	1.56	2.22	2.78	3.32	3.84	4.35	5.34
2700	kW	1.75	2.5	3.13	3.73	4.33	4.90	6.01
3000	kW	2.17	2.78	3.48	4.15	4.81	5.44	6.68
THERMARAD CLASSIC TYPE 33								
L (mm)	H (mm)	200	300	400	500	600	700	900
400	kW	0.42	0.68	0.86	1.04	1.20	1.36	1.67
500	kW	0.52	0.85	1.08	1.3	1.50	1.71	2.09
600	kW	0.63	1.02	1.29	1.55	1.80	2.05	2.51
700	kW	0.73	1.19	1.51	1.81	2.10	2.39	2.93
800	kW	0.84	1.37	1.73	2.07	2.41	2.73	3.35
900	kW	0.94	1.54	1.94	2.33	2.71	3.07	3.77
1000	kW	1.05	1.71	2.16	2.59	3.01	3.41	4.19
1100	kW	1.15	1.88	2.37	2.85	3.31	3.75	4.61
1200	kW	1.26	2.05	2.59	3.11	3.61	4.09	5.02
1300	kW	1.36	1.88	2.81	3.37	3.91	4.43	5.44
1400	kW	1.46	2.39	3.02	3.63	4.21	4.78	5.86
1500	kW	1.57	2.56	3.24	3.89	4.51	5.12	6.28
1600	kW	1.67	2.73	3.45	4.15	4.81	5.46	6.70
1700	kW	1.78	2.90	3.67	4.4	5.11	5.80	7.12
1800	kW	1.88	3.07	3.88	4.66	5.41	6.14	7.54
1900	kW	1.99	3.24	4.10	4.92	5.71	6.48	7.96
2000	kW	2.09	3.41	4.32	5.18	6.01	6.82	8.37
2200	kW	2.30	3.76	4.75	5.7	6.62	7.50	9.21
2400	kW	2.51	4.10	5.18	6.22	7.22	8.19	10.05
2700	kW	2.82	4.61	5.83	7.00	8.12	9.21	11.30
3000	kW	3.14	5.12	6.47	7.77	9.02	10.23	12.56

Heating with style...

Elegant, efficient, durable
ThermaRad radiators are produced with an environmentally friendly multistage painting process for an increased product life and stylish finish.

All styles available as 4 port and 6 port radiators. 6 port radiators offer VK (compact valve) connection option.

Side covers and top grilles are removable for easy cleaning and/or replacement on all styles.

Shaded areas indicate sizes ex stock

Colour

Powder coat RAL9016 Traffic White

Warranty

25 year warranty against manufacturing defects (conditions apply)



Classic

VK (compact valve) 6 port radiators pictured



ThermaDesign



ThermaStyle

hurlcon hydronic heating

V30060514

Melbourne: 03 9554 2275
Sydney: 02 9853 2100
Brisbane: 07 3308 5400
Gold Coast: 07 5552 2600

Townsville: 07 4796 0100
Adelaide: 08 8152 7600
Perth: 08 9350 2600

www.hurlconheating.com.au
enquiries@hurlconheating.com.au